



The Itipack Vh-30-M strapping head is intended for installation in semi-automatic and fully automated non-metallic strapping machines.

It functions as a sturdy, reliable and easy-to-maintain central aggregate for bundling, packaging and securing a variety of different types and shapes of packages.

It is a quality product and is used successfully in a number of fields of application.

It has established itself in numerous lines of industry throughout the world.

The Itipack Vh-30-M strapping head is electrically operated and is fully wired ready for operation after inserting the plug into a socket. This means it can be quickly removed and tested outside the machine during service and repair work.

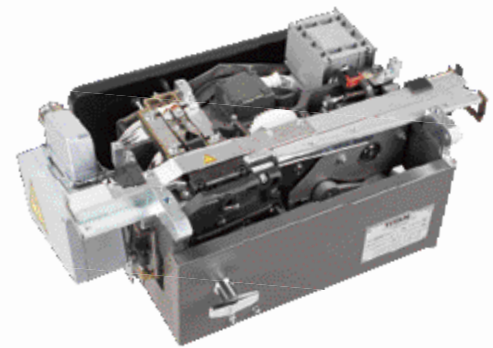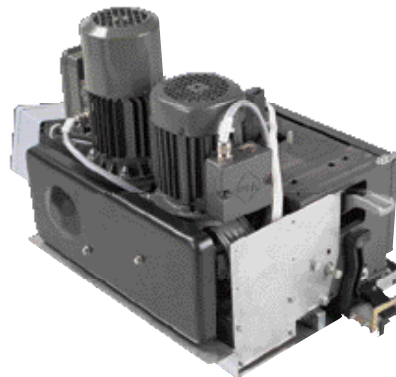

The 3 threephase motors enable a very flexible control engineering design of the unit, even for special applications. The Itipack VK-30-M strapping head can be used with polyester (PET) and other heat sealing straps with widths between 16 and 19mm.

The strap width can be infinitely adjusted.

Polyester/polypropylene straps of between 5/8" and 3/4" can be used.

The maximum possible strap tension is 1100 lbs.

Every strapping head has to pass a complete functional test and high-voltage test before leaving our works.

The Itipack VK-30-M strapping head complies with German and European safety standards.

TECHNICAL DATA

- high-efficiency, all electric, heat seal strapping head
- manufactured in the Schwelm region of Germany
- can be used in almost every type of heavy duty industry
- performs well in the lumber, brick and even the steel industry
- does not need lubrication
- the sealing heater blade has a precision temperature controller adjustable to suit the various grades and types of plastic strapping
- 80% - 90% efficiency on the strap braking load are capable with machine grade PET and PP strapping

Strap Widths: 5/8" - 3/4"
Strap Thickness: 020" - 050"
Strap Quality: strap suitable for automatic machines
Strap Tension (Adjustable): 1100 lb. max.
Minimum Flat Surface: 6"
Length of Seal: 1"
Feed Speed: 14.5 ft/sec
Control Voltage: 24DC or 110 V/AC

